Nov 25 | V3.0

MyBrim App User Guide

ANDROID APP ON Google play

Download on the App Store

Download the 'My Brim' App and create your account

Wi-Fi Charger Setup (BR-AC7000-01) ..... Pages 1-6

4G Charger Setup (BR-AC7000-4G) ..... Pages 7-11

Starting a Charge ..... Pages 12-13

Creating a Charging Schedule ..... Pages 14-16

Charging with an RFID card ..... Pages 17-19

Switching to Plug & Play mode ..... Pages 20-23

Top Up your Wallet (Public Charging Only) ..... Pages 24-25

Withdrawing Money from your Wallet (Public Charging Only) ..... Pages 26-27

Connecting to a Public Charger (Public Charging Only) ..... Pages 28-30

Viewing Transactions (Public Charging Only) ..... Pages 31-32

Wi-Fi Charger Setup
(BR-AC7000-01)

If your charger is in range of your Wi-Fi modem, it's likely a Wi-Fi model. To confirm, check the product code below the QR code on the left side of the charger—it should read "**BR-AC7000-01**". If it reads "**BR-AC7000-4G**", follow the setup process on pages **7–11** instead.

Step 1

Tap the addition button to add a new charger

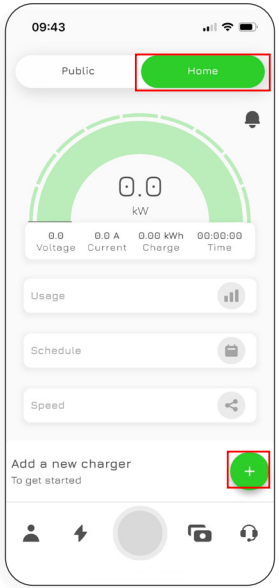

Step 2

Select 'Add a charge point'

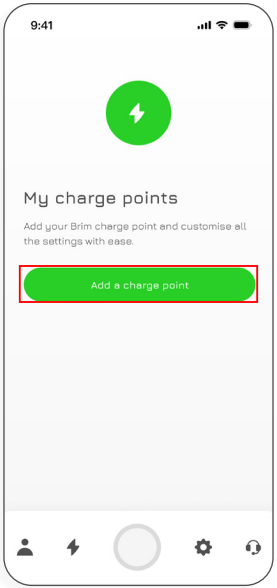

Step 3

Select "Scan QR code" or enter the Serial Number manually (Found on the side of the charger, beginning **SN1005...**)

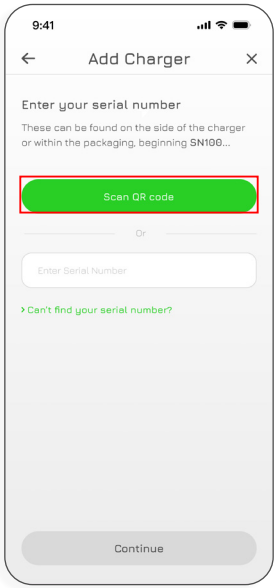

Step 4

Scan the QR code which is located on the front or side of your charger

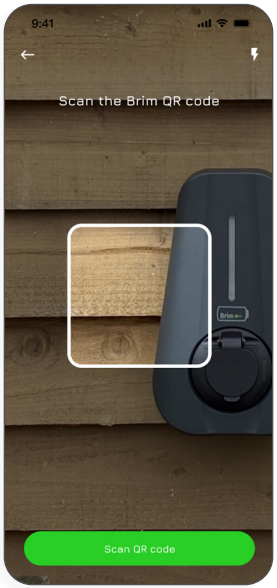

Step 5

The Serial Number of your charger should autofill, select 'Continue'

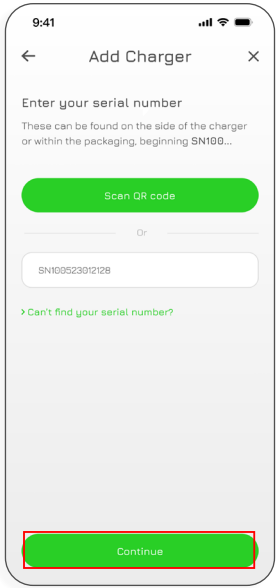

Step 6

Restart your charger - this may be possible at your fuse board. Then, select 'Continue'

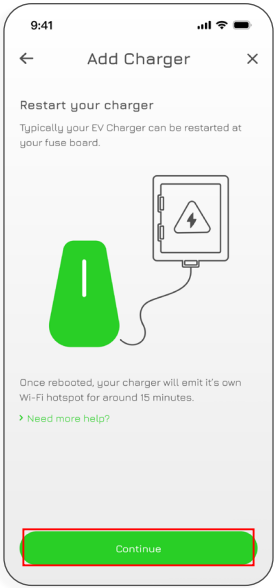

Step 7

You will be asked to join your charger's hotspot. You will not be able to continue until you do

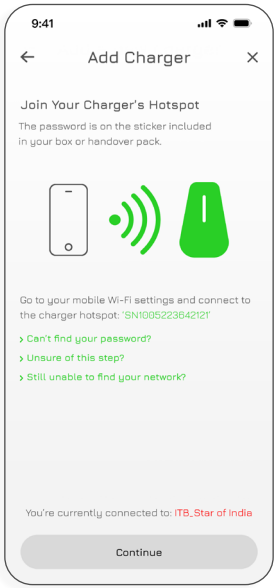

Step 8

Confirm that you are connected to the charger hotspot, and not your home network

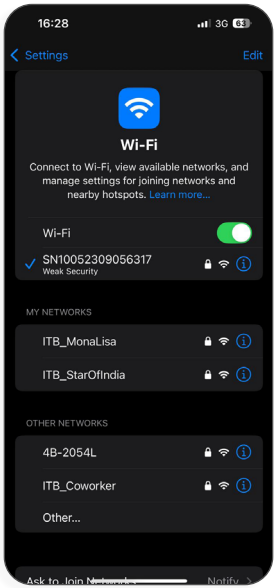

Step 9

You will be able to select 'Continue' once you are connected

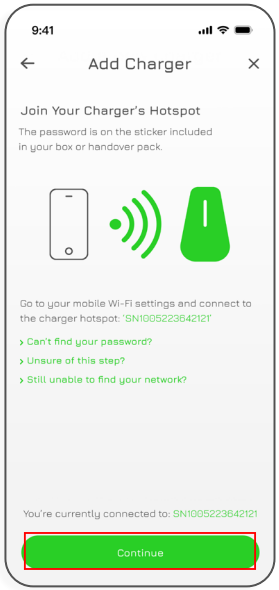

Step 10

Enter your 4 digit charger pin

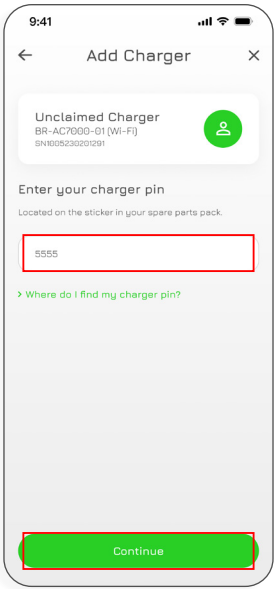

Step 11

You will get a confirmation that your Wi-Fi charger has been recognised - click 'Continue'

Step 12

Select your home Wi-Fi from the drop down, enter the password and click 'Confirm'

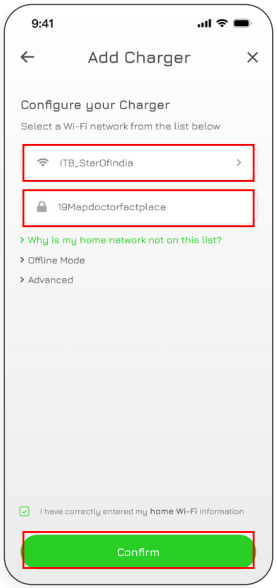

Step 13

Your charger will 'click' and restart. Rejoin your home network and continue

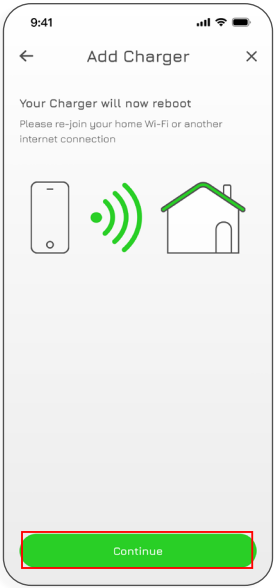

Step 14

It will take a moment for your charger to establish a connection

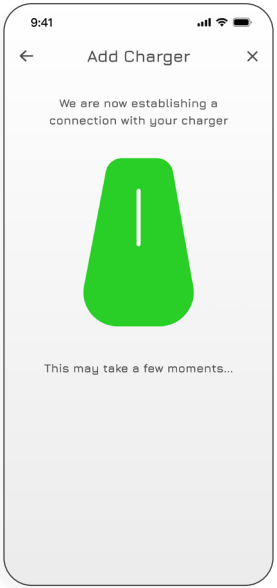

Step 15

Once the app shows 'Connection Successful', select 'Continue' to move forward

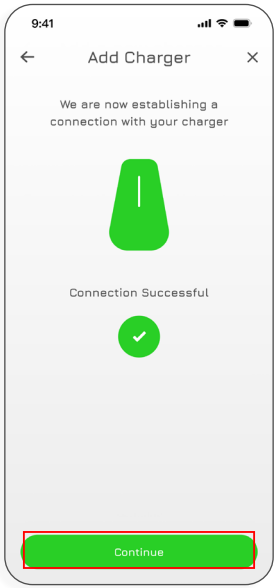

Step 16

Add a name and location for your charger. You may use the GPS function to autofill your address

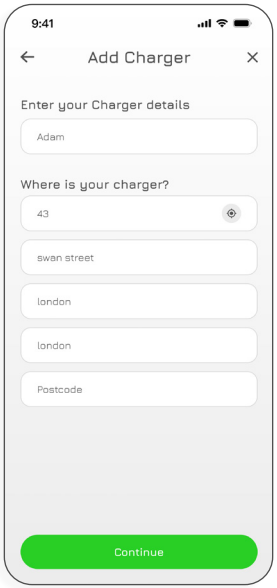

Step 17

Your setup is complete! Select 'Finish' to exit the setup process

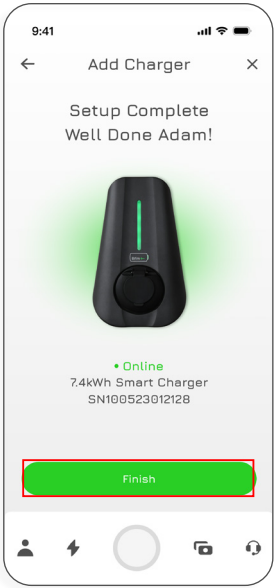

Step 18

Your charger can now be seen in your charger tab (lighting bolt icon)

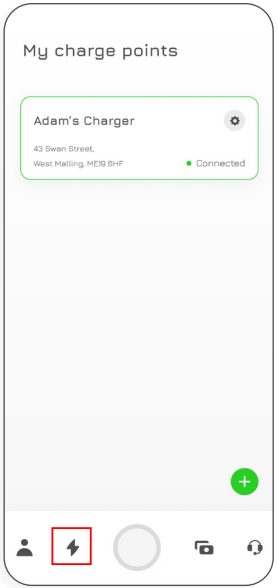

4G Charger Setup
(BR-AC7000-4G)

If your charger is out of range of your Wi-Fi modem, it's likely a 4G model. To confirm, check the product code below the QR code on the left side of the charger—it should read "**BR-AC7000-4G**". If it reads "**BR-AC7000-01**", follow the setup process on pages **1-6** instead.

Step 1

Tap the addition button to add a new charger

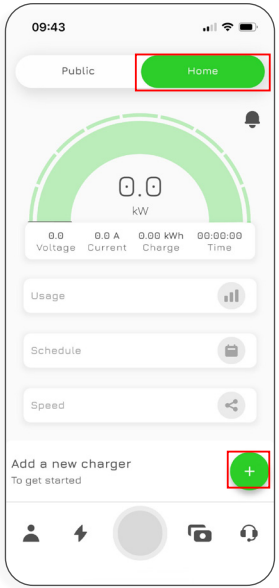

Step 2

Select 'Add a charge point'

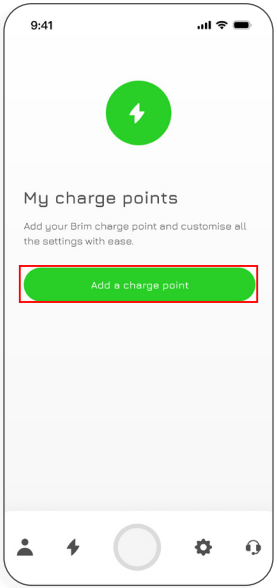

Step 3

Select "Scan QR code" or enter the Serial Number manually (Found on the side of the charger, beginning **SN1005...**)

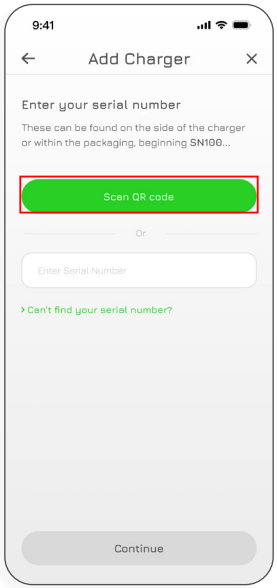

Step 4

Scan the QR code which is located on the front or side of your charger

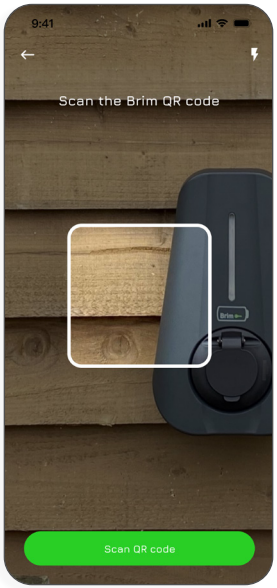

Step 5

The Serial Number of your charger should autofill, select 'Continue'

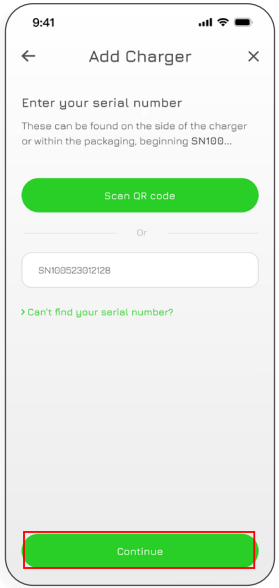

Step 6

Restart your charger - this may be possible at your fuse board. Then, select 'Continue'

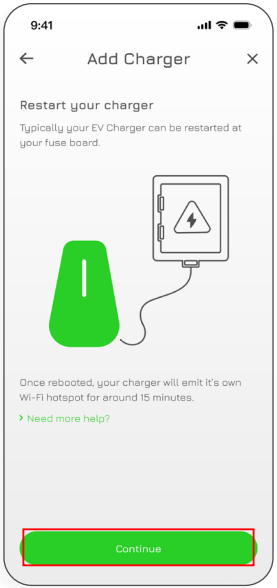

Step 7

You will be asked to join your charger's hotspot. You will not be able to continue until you do

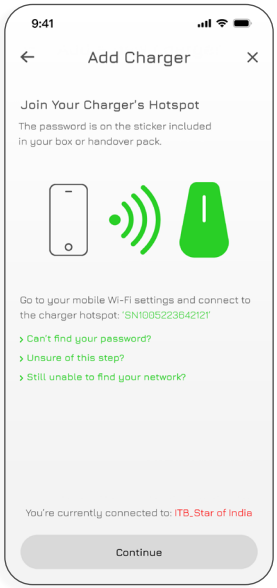

Step 8

Confirm that you are connected to the charger hotspot, and not your home network

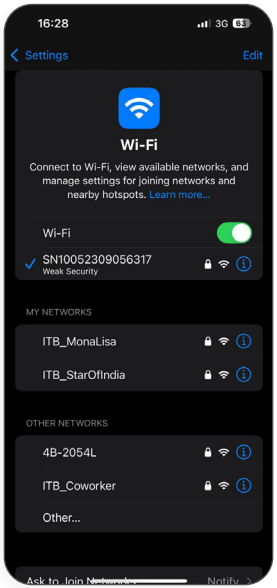

Step 9

You will be able to select 'Continue' once you are connected

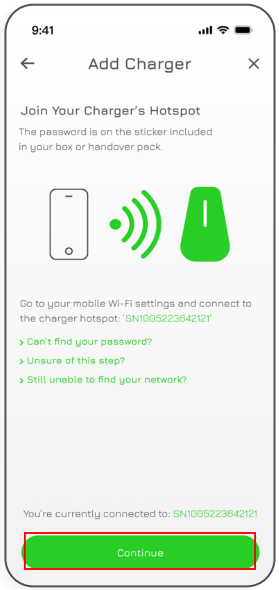

Step 10

Enter your 4 digit charger pin

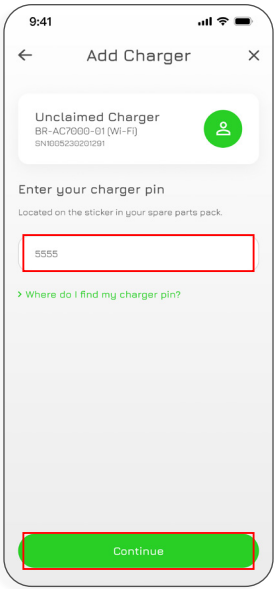

Step 11

You will get a confirmation that your 4G charger has been recognised - click 'Continue'

Step 12

Your charger will 'click' and restart. Rejoin your home network and continue

Step 13

Once the app shows 'Connection Successful', select 'Continue' to move forward

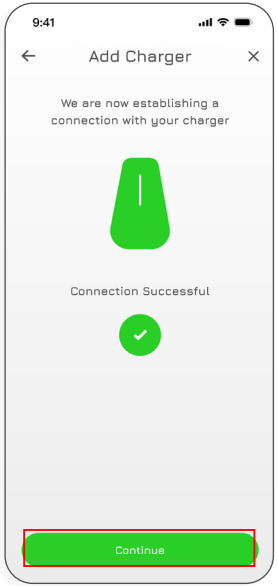

Step 14

Add a name and location for your charger. You may use the GPS function to autofill your address

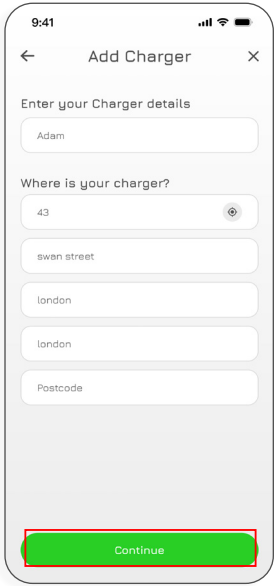

Step 15

Your setup is complete! Select 'Finish' to exit the setup process

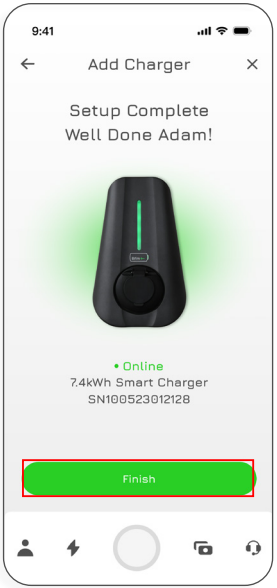

Step 16

Your charger can now be seen in your charger tab (lighting bolt icon)

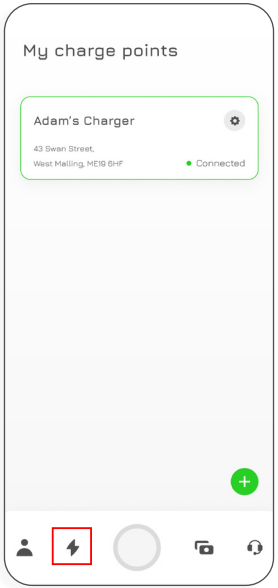

Starting a Charge

Step 1

In your 'Home' tab, tap on the 'Start' button to begin charging

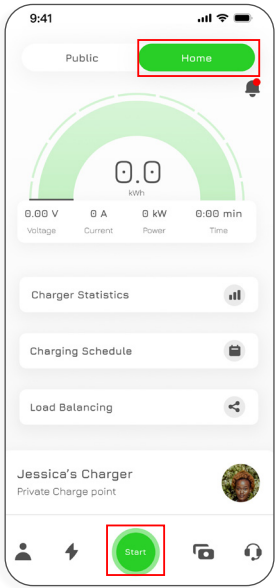

Step 2

You will have to wait momentarily before your car starts charging

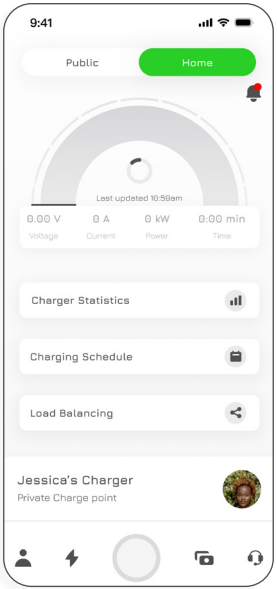

Step 3

Tap on the 'Stop' button to end your charging session

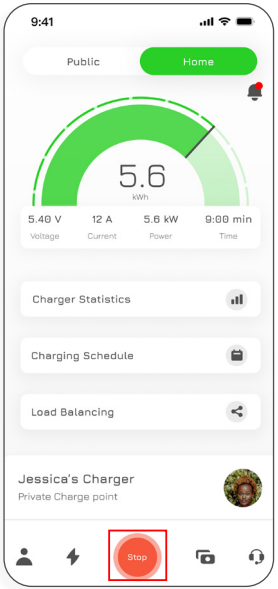

Creating a Charging Schedule

Your car will charge according to schedule, provided the charger is plugged into your car. It will stop charging once your car has reached full capacity, or at the end of your schedule.

Step 1

Tap on the 'Charging Schedule' button

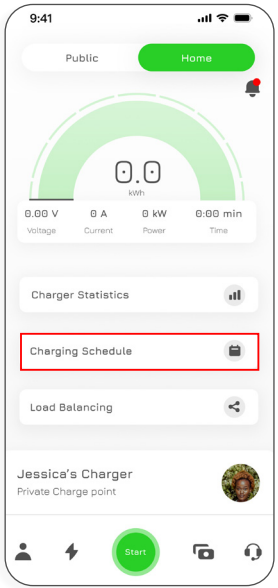

Step 2

Tap on the addition button in the bottom right corner

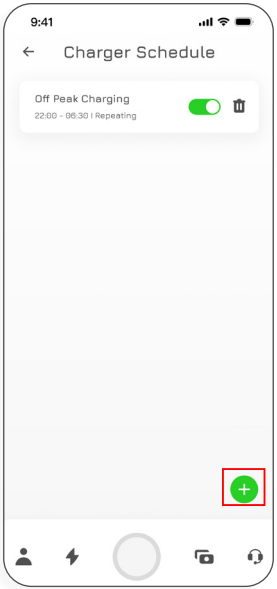

Step 3

Select your start and end time, and day of the week for your charge

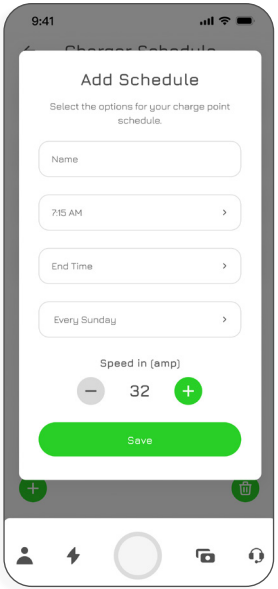

Step 4

Set a time
and specify
AM or PM

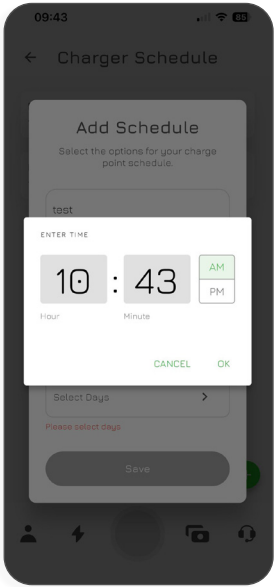

Step 5

Use the toggle to turn
on/off the schedule
on certain days

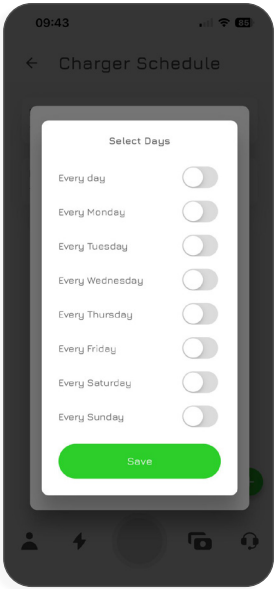

Charging with an RFID card

Another way to charge your car is by using an RFID card—simply tap it on the charger to start your session. Your package should include two RFID cards.

If you've already added your home charger in the app: you'll need to add your RFID cards in the app before using them (see page 11).

If you've not yet added your home charger in the app: your RFID cards can be used offline to charge your car, until your charger has been added in the app (see page 12 for charging instructions).

Step 1

In your chargers tab, tap on the settings icon of your home charger

Step 2

In your charger settings, tap on the button labelled 'RFID Cards'

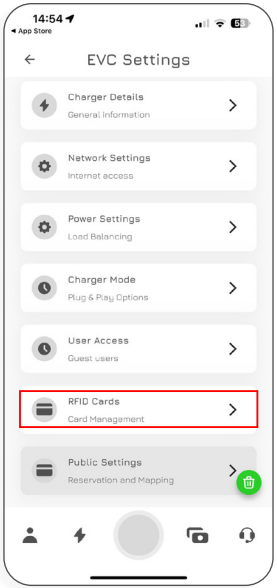

Step 3

Tap on the addition button at the bottom left of your screen

Step 4

Enter a card name, and the 8 digit number from your RFID card

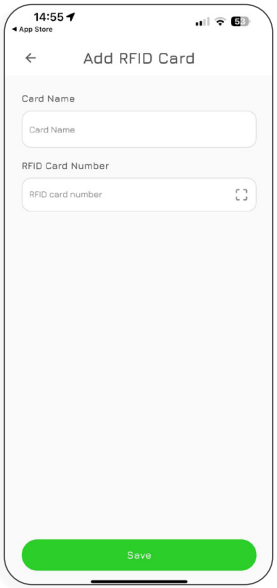

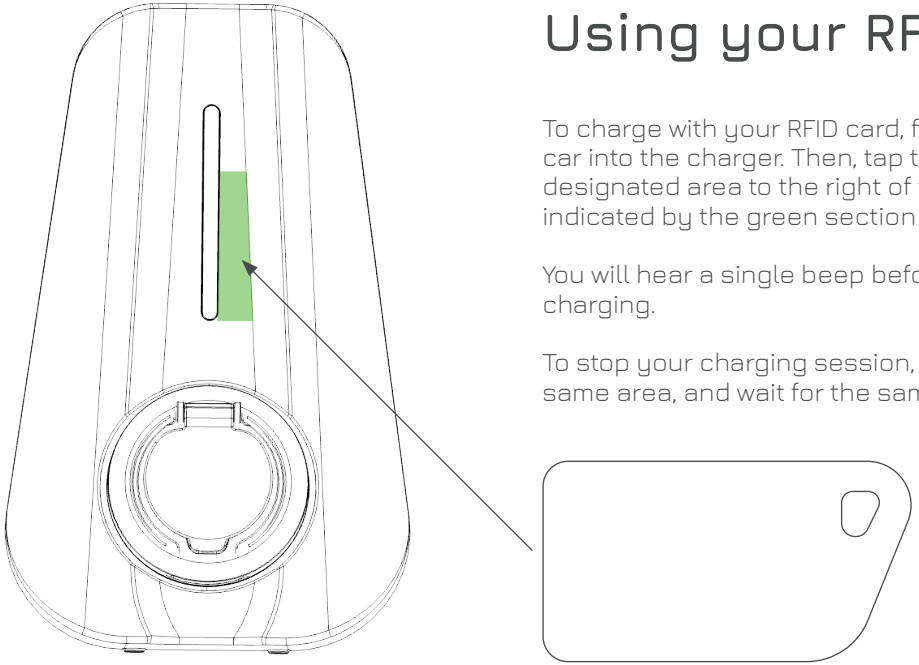

Using your RFID card

To charge with your RFID card, first plug your car into the charger. Then, tap the card on the designated area to the right of the charger light, as indicated by the green section in the illustration.

You will hear a single beep before your car begins charging.

To stop your charging session, tap the card on the same area, and wait for the same beep.

Switching to Plug & Play Mode

Need to charge your car but having network issues?

Switch your charger into 'Plug & Play' mode. Your charging session will then begin automatically when connecting your car.

Note: Plug & Play is a public mode allowing open access to your charger.

Step 1

In your chargers tab, select the settings icon of the charger you wish to edit

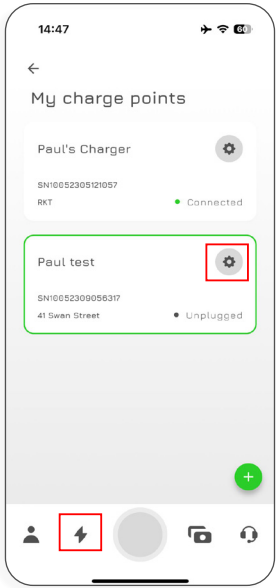

Step 2

Select 'Charger Mode' to access charger mode settings

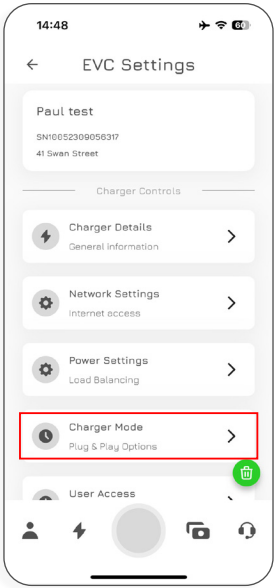

Step 3

Click on 'Edit Settings' to change the charger mode

Step 4

Enter your charger details which came in your packaging

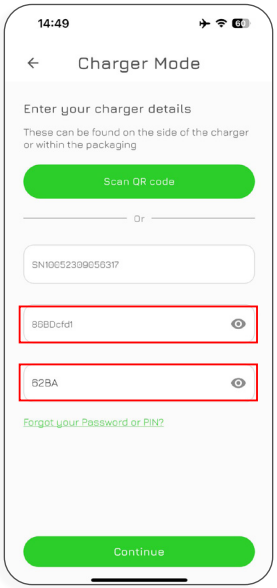

Step 5

Restart your charger - this may be possible at your fuse board. Then, select 'Continue'

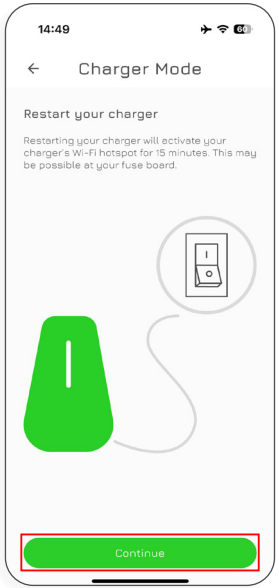

Step 6

Connect to your charger's hotspot before you continue. Copy Wi-Fi password to paste later

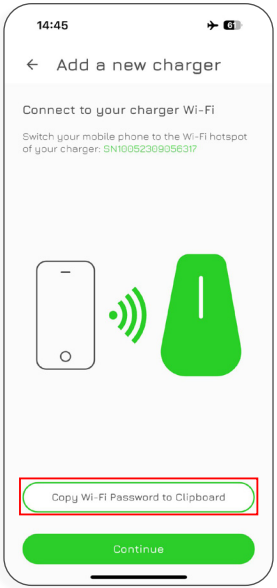

Step 7

Confirm that you are connected to the charger hotspot and not your home network

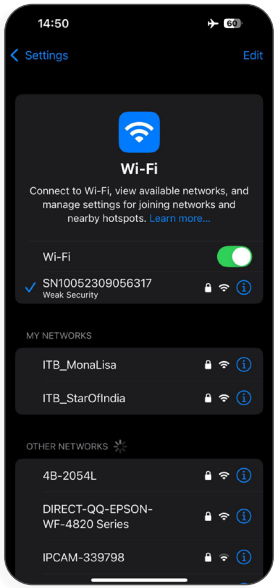

Step 8

Tap 'Continue' if you have connected to your charger's hotspot

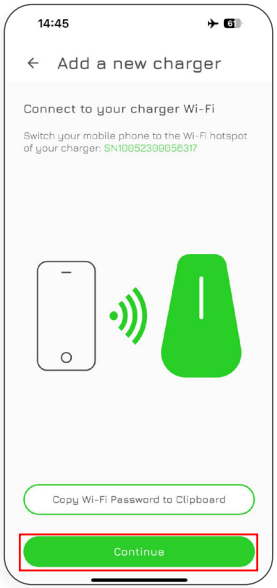

Step 9

Switch the charging mode from 'App Controlled' to 'Plug & Play'

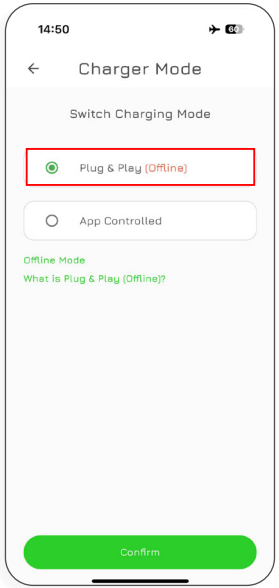

Step 10

Reconnect to your home network before continuing

Step 11

Your Plug & Play setup is now complete

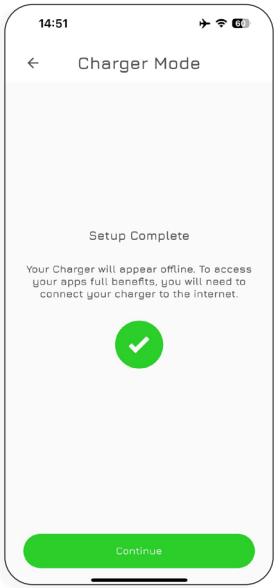

Step 12

The charger should now say 'Offline Plug & Play' within your chargers tab

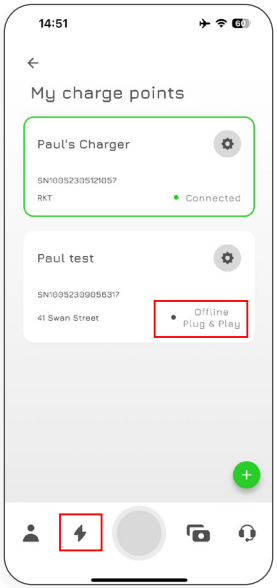

Top Up your Wallet
(Public Charging Only)

Step 1

Tap on the wallet icon on your navigation bar

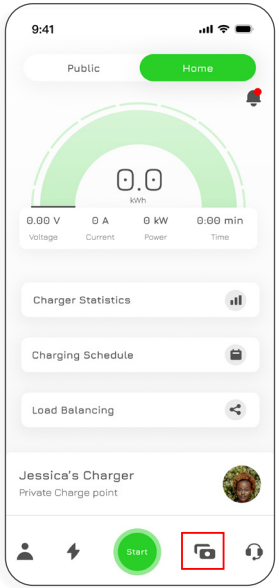

Step 2

Select 'Top Up' to add money to your wallet

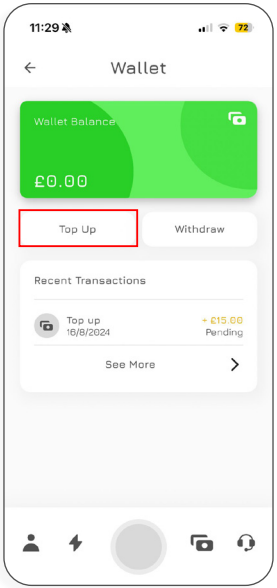

Step 3

Enter your desired amount in the text field

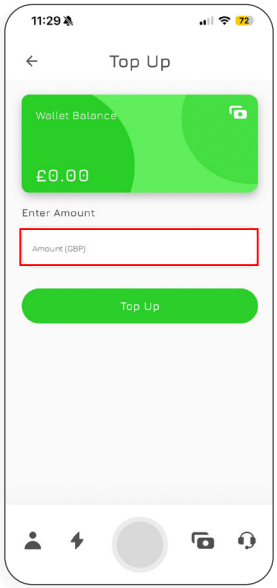

Step 4

Enter your payment information

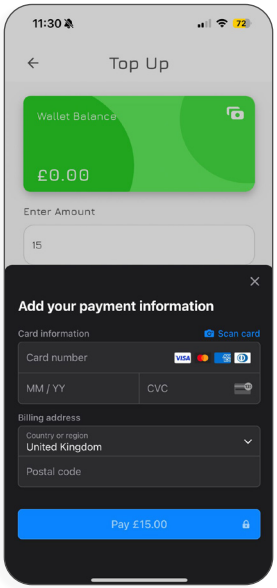

Withdrawing Money from your Wallet

(Public Charging Only)

Step 1

Tap on the wallet icon on your navigation bar

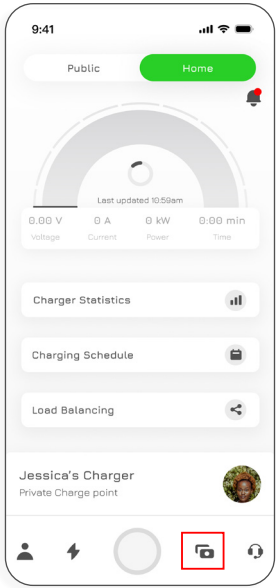

Step 2

Select 'Withdraw' to withdraw money from your wallet

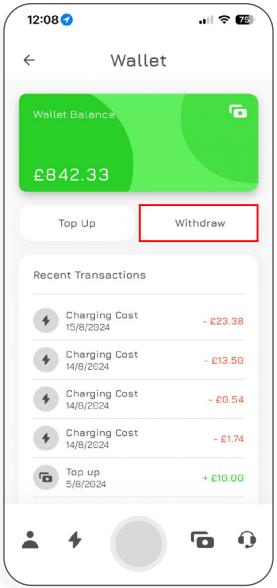

Step 3

Enter the withdrawal amount and your account details

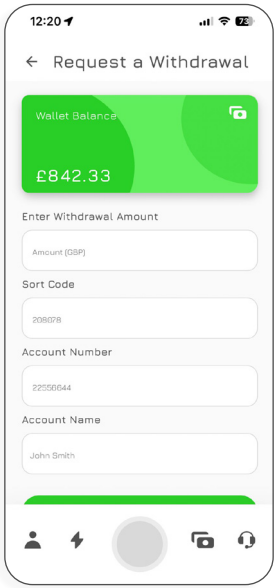

Step 4

You will receive a confirmation notification

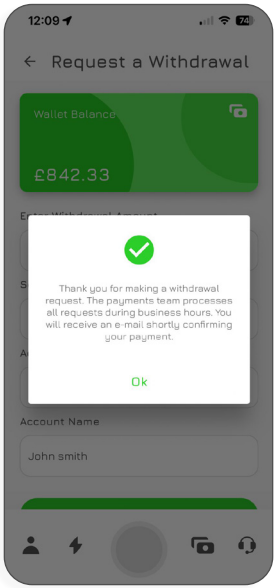

Connecting to a Public Charger

(Public Charging Only)

Step 1

Select the 'Public' tab at the top of your screen

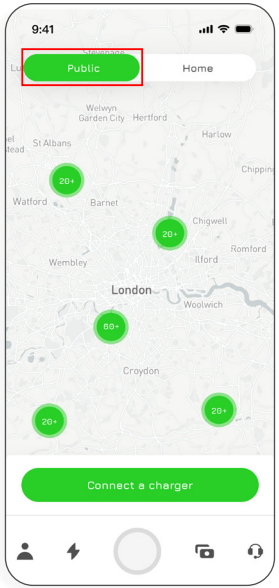

Step 2

Select 'Scan QR Code' or select from recently used chargers

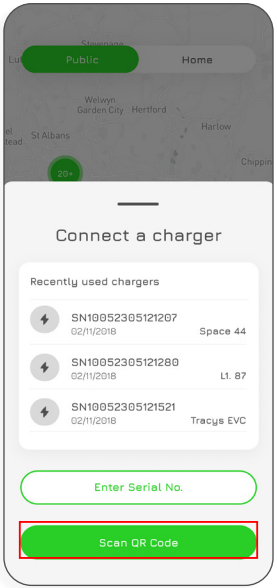

Step 3

Scan the QR code on the front flap or side of your charger

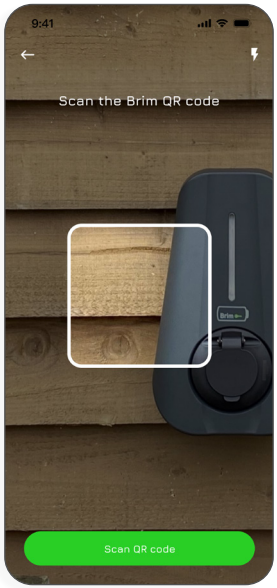

Step 4

Tap 'Start' to begin charging. NB: you need a positive balance in your wallet

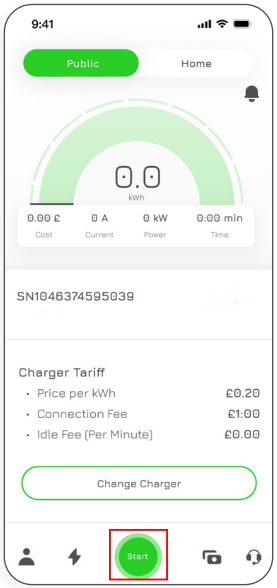

Step 5

Tap on the 'Stop' button to end a charging session

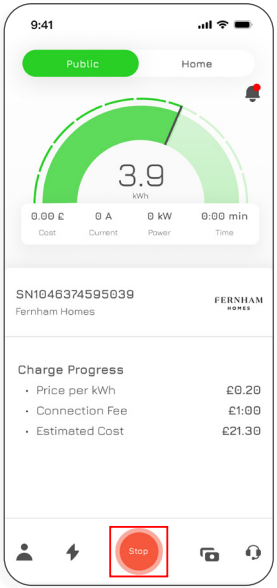

Step 6

You will be shown a summary of your transaction

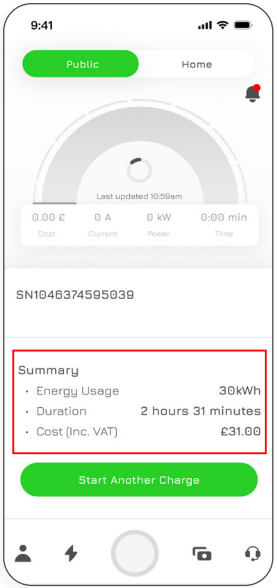

Viewing Transactions
(Public Charging Only)

Step 1

Tap on the wallet icon on your navigation bar

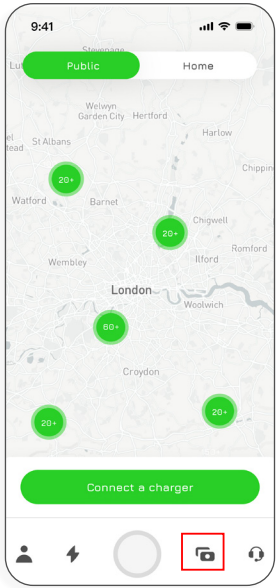

Step 2

To view a full list of your transactions, select 'See More'

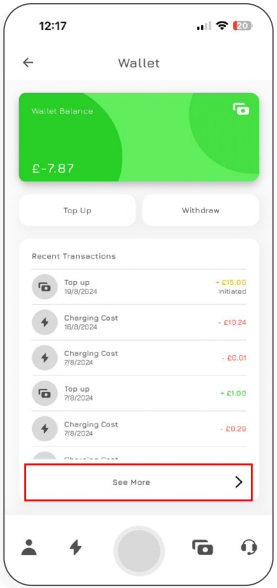

Step 3

Select any of your transactions to see the full details

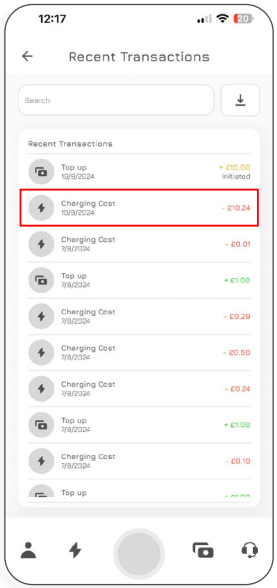

Step 4

You will be shown a full transaction summary

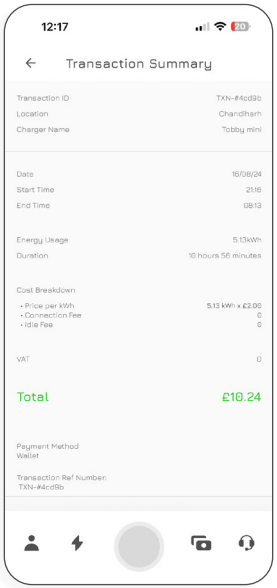

Brim

plugmein@fulltothebrim.com
+44 020 7097 5911
www.fulltothebrim.com